

Power Grip Chuck Holder


JIS B6339

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

COOLANT SYSTEM
AD, AD/B

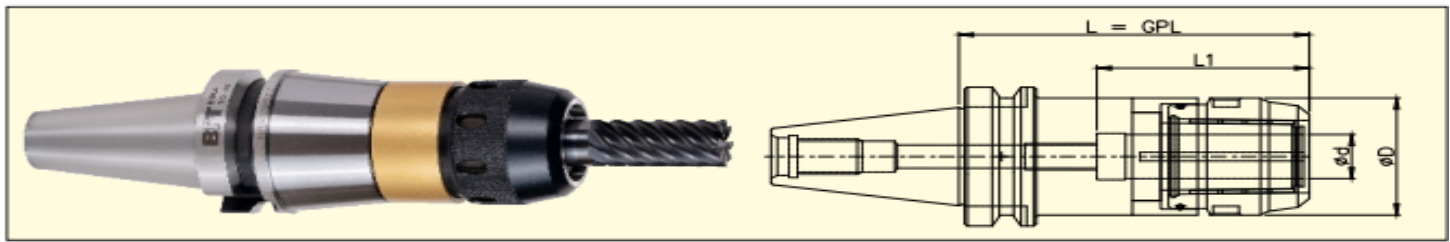

Catalogue No	Collet Type	Clamping Range	d	D	L	L1	Wrench	Weight
BT - MAS 403, JIS B 6339								
BT30S20090M	20CNS	4 - 20	20	53	90	72	SS20-Wrench	1.4
BT30SS25100M	25CNS	6 - 25	25	58	100	82	SS25-Wrench	1.5
BT40S20120M	20CNS	4 - 20	20	53	120	72	SS20-Wrench	2.8
BT40SS25120M	25CNS	6 - 25	25	58	120	82	SS25-Wrench	2.7
BT40SS32110M	32CNS	6 - 32	32	69	110	95	SS32-Wrench	3.0
BT40SS32130M	32CNS	6 - 32	32	69	130	95	SS32-Wrench	3.3
BT50S20150M	20CNS	4 - 20	20	53	150	72	SS20-Wrench	6.0
BT50SS25100M	25CNS	6 - 25	25	58	100	82	SS25-Wrench	4.6
BT50SS25150M	25CNS	6 - 25	25	58	150	82	SS25-Wrench	5.5
BT50SS32115M	32CNS	6 - 32	32	69	115	95	SS32-Wrench	6.5
BT50SS32150M	32CNS	6 - 32	32	69	150	95	SS32-Wrench	6.4
BT50SS20120M	20CNS	4 - 20	20	53	120	72	SS20-Wrench	5.1
BT50SS20135M	20CNS	4 - 20	20	53	135	72	SS20-Wrench	5.6
Dynamically Balanced at : G6.3@15,000 RPM Order Example : BT40SS20120M Dynamically balanced on Request G2.5@20,000 RPM Order Example : BT40SS20120MG2.5				Scope of Supply : Basic Tool Holder, Stopscrew Accessories : To be ordered separately Pull Stud : Page No. All details are subject to change without Notice				

Power Grip Chuck Holder

DIN 69893

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

COOLANT SYSTEM
AD

Catalogue No	Collet Type	Clamping Range	d	D	L	L1	Wrench	Weight
HSK63ASS20100M	20CNS	4 - 20	20	53	100	72	SS20-Wrench	2.2
HSK63SS32105M	32CNS	6 - 32	32	69	105	95	SS32-Wrench	3.0
HSK63ASS25105M	25CNS	6 - 25	25	58	105	82	SS25-Wrench	2.6
HSK100ASS20135M	20CNS	4 - 20	20	53	135	72	SS20-Wrench	3.8
HSK100ASS32165M	32CNS	6 - 32	32	69	165	95	SS32-Wrench	5.0
HSK100ASS25115M	25CNS	6 - 25	25	58	115	82	SS25-Wrench	3.4
HSK100ASS25135M	25CNS	6 - 25	25	58	135	82	SS25-Wrench	4.0
HSK100ASS20165M	20CNS	4 - 20	20	53	165	72	SS20-Wrench	4.6
HSK100ASS20115M	20CNS	4 - 20	20	53	115	72	SS20-Wrench	3.2
HSK100ASS32115M	32CNS	6 - 32	32	69	115	95	SS32-Wrench	3.4
HSK100ASS32135M	32CNS	6 - 32	32	69	135	95	SS32-Wrench	4.2
HSK100ASS25165M	25CNS	6 - 25	25	58	165	82	SS25-Wrench	4.8
Dynamically Balanced at : G6.3@15,000 RPM Order Example : HSK100ASS20135M Dynamically balanced on Request G2.5@20,000 RPM Order Example : HSK100ASS20135MG2.5				Scope of Supply : Basic Tool Holder, Stopscrew Accessories : To be ordered separately Pull Stud : Page No. All details are subject to change without Notice				

Power Grip Chuck

DIN 69871

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

COOLANT SYSTEM
AD, AD/B

Catalogue No	Fig	D1	D2	L1	L2	Wt.Kg	Clamping Screw	Weight
DV40SS20105M	20CNS	4 - 20	20	53	105	72	SS20-Wrench	2.5
DV40SS25105M	25CNS	6 - 25	25	58	105	82	SS25-Wrench	2.5
DV40SS25130M	25CNS	6 - 25	25	58	130	82	SS25-Wrench	2.7
DV40SS32105M	32CNS	6 - 32	32	69	105	95	SS32-Wrench	2.5
DV40SS32130M	32CNS	6 - 32	32	69	130	95	SS32-Wrench	3.0
DV50SS20105M	20CNS	4 - 20	20	53	105	72	SS20-Wrench	4.3
DV50SS25105M	25CNS	6 - 25	25	58	105	82	SS25-Wrench	4.2
DV50SS25150M	25CNS	6 - 25	25	58	150	82	SS25-Wrench	5.0
DV50SS32105M	32CNS	6 - 32	32	69	105	95	SS32-Wrench	4.7
DV50SS32150M	32CNS	6 - 32	32.00	69.00	150	95	SS32-Wrench	5.90

Dynamically Balanced at : G6.3@15,000 RPM
Order Example : DV40SS25105M
Dynamically balanced on Request
G2.5@20,000 RPM
Order Example : DV40SS25105MG2.5

Scope of Supply : Basic Tool Holder, Stopscrew
Accessories : To be ordered seperately
Pull Stud : Page No.
All details are subject to change without Notice