

WHISTLE NOTCH ADAPTERS


JIS B6339

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

COOLANT SYSTEM
AD, AD/B

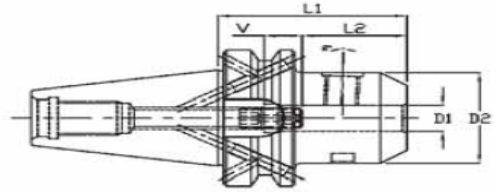

Catalogue No	D1	D2	L1	L2	V	Wt.Kg	Clamp Screw	Allen Key	Stop Screw	Hex
BT30WN06080M	6	25	80	28	8	0.47	BSS03M012	3 mm	B.571.060	2.5 mm
BT30WN08080M	8	28	80	28	10	0.49	BSS03M014	4 mm	B.571.061	3.0 mm
BT30WN10080M	10	35	83	32	10	0.58	BSS03M018	5 mm	B.571.062	4.0 mm
BT30WN12090M	12	42	90	37	10	0.66	BSS03M023	6 mm	B.571.063	5.0 mm
BT30WN14090M	14	44	90	37	10	0.68	BSS03M023	6 mm	B.571.063	5.0 mm
BT30WN16090M	16	48	90	40	12	0.71	BSS03M025	6 mm	B.571.064	6.0 mm
BT40BWN06050M	6	25	50	30	10	1.03	BSS03M012	3 mm	B.571.060	2.5 mm
BT40BWN08050M	8	28	50	30	10	1.05	BSS03M014	4 mm	B.571.067	3.0 mm
BT40BWN10063M	10	35	63	35	10	1.18	BSS03M018	5 mm	B.571.068	4.0 mm
BT40BWN12063M	12	42	63	40	10	1.27	BSS03M023	6 mm	B.571.068	5.0 mm
BT40BWN14063M	14	44	63	40	10	1.29	BSS03M023	6 mm	B.571.074	5.0 mm
BT40BWN16063M	16	48	63	43	10	1.34	BSS03M025	6 mm	B.571.075	6.0 mm
BT40BWN18063M	18	50	63	43	10	1.36	BSS03M025	6 mm	B.571.075	6.0 mm
BT40BWN20063M	20	52	63	45	10	1.36	BSS03M026	8 mm	B.571.076	6.0 mm
BT40BWN25090M	25	65	90	55	10	2.16	BSS03M027	10 mm	B.571.076	6.0 mm
BT40BWN32100M	32	72	100	54	10	2.58	BSS03M029	10 mm	B.571.076	6.0 mm
BT50BWN06063M	6	25	63	40	8	3.63	BSS03M012	3 mm	B.571.060	2.5 mm
BT50BWN08063M	8	28	63	40	10	3.64	BSS03M014	4 mm	B.571.067	3.0 mm
BT50BWN10063M	10	35	63	45	10	3.69	BSS03M018	5 mm	B.571.068	4.0 mm
BT50BWN12080M	12	42	80	50	10	3.92	BSS03M023	6 mm	B.571.074	5.0 mm
BT50BWN14080M	14	44	80	50	10	3.95	BSS03M023	6 mm	B.571.074	5.0 mm
BT50BWN16080M	16	48	80	53	12	4.02	BSS03M025	6 mm	B.571.075	6.0 mm
BT50BWN18080M	18	50	80	53	12	4.05	BSS03M025	6 mm	B.571.075	6.0 mm
BT50BWN20080M	20	52	80	55	12	4.06	BSS03M026	8 mm	B.571.076	6.0 mm
BT50BWN25100M	25	65	100	60	16	4.9	BSS03M027	10 mm	B.571.076	6.0 mm
BT50BWN32105M	32	72	105	64	16	5.2	BSS03M029	10 mm	B.571.076	6.0 mm

Dynamically Balanced at : G6.3@15,000 RPM
Order Example : BT40BWN08050M
Dynamically balanced on Request
G2.5@20,000 RPM
Order Example : BT40BWN08050MG2.5

Scope of Supply : Basic Tool Holder, Lockscrew
Accessories : To be ordered separately
Pull Stud : Page No.
All details are subject to change without Notice

WHISTLE NOTCH ADAPTERS


DIN 69893

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

COOLANT SYSTEM
AD



Catalogue No	D1	D2	L1	L2	V	Wt.Kg	Clamp Screw	Allen Key	Stop Screw	Hex
HSK50AWN06080M	6	25	80	30	10	0.56	BSS03M012	3 mm	B.571.060	2.5 mm
HSK50AWN08080M	8	28	80	30	10	0.6	BSS03M014	4 mm	B.571.067	3.0 mm
HSK50AWN10080M	10	35	80	35	7	0.72	BSS03M018	5 mm	B.571.068	4.0 mm
HSK50AWN12090M	12	42	90	40	7	0.97	BSS03M023	6 mm	B.571.074	5.0 mm
HSK50AWN14090M	14	44	90	40	8	1.01	BSS03M023	6 mm	B.571.074	5.0 mm
HSK50AWN16090M	16	48	90	43	10	1.08	BSS03M025	6 mm	B.571.075	6.0 mm
HSK50AWN18090M	18	50	90	43	10	1.12	BSS03M025	6 mm	B.571.075	6.0 mm
HSK50AWN20100M	20	52	100	45	8	1.3	BSS03M026	8 mm	B.571.076	6.0 mm
HSK63AWN06080M	6	25	80	30	10	0.82	BSS03M012	3 mm	B.571.060	2.5 mm
HSK63AWN08080M	8	28	80	30	10	0.86	BSS03M014	4 mm	B.571.067	3.0 mm
HSK63AWN10080M	10	35	80	35	7	1	BSS03M018	5 mm	B.571.068	4.0 mm

HSK63AWN12090M	12	42	90	40	7	1.23	BSS03M023	6 mm	B.571.074	5.0 mm
HSK63AWN14090M	14	44	90	40	8	1.28	BSS03M023	6 mm	B.571.074	5.0 mm
HSK63AWN16100M	16	48	100	43	10	1.53	BSS03M025	6 mm	B.571.075	6.0 mm
HSK63AWN18100M	18	50	100	43	10	1.59	BSS03M025	6 mm	B.571.075	6.0 mm
HSK63AWN20100M	20	52	100	45	8	1.65	BSS03M026	8 mm	B.571.076	6.0 mm
HSK63AWN25110M	25	65	110	50	9	2.31	BSS03M027	10 mm	B.571.076	6.0 mm
HSK63AWN32110M	32	72	110	54	9	2.55	BSS03M029	10 mm	B.571.076	6.0 mm
HSK100AWN06090M	6	25	90	30	10	2.2	BSS03M012	3 mm	B.571.060	2.5 mm
HSK100AWN08090M	8	28	90	30	10	2.26	BSS03M014	4 mm	B.571.067	3.0 mm
HSK100AWN10090M	10	35	90	35	10	2.4	BSS03M018	5 mm	B.571.068	4.0 mm
HSK100AWN12100M	12	42	100	40	10	2.65	BSS03M023	6 mm	B.571.074	5.0 mm
HSK100AWN14100M	14	44	100	40	10	2.71	BSS03M023	6 mm	B.571.074	5.0 mm
HSK100AWN16100M	16	48	100	43	10	2.84	BSS03M025	6 mm	B.571.075	6.0 mm
HSK100AWN18100M	18	50	100	43	10	2.91	BSS03M025	6 mm	B.571.075	6.0 mm
HSK100AWN20110M	20	52	110	45	10	3.11	BSS03M026	8 mm	B.571.076	6.0 mm
HSK100AWN25120M	25	65	120	50	10	3.97	BSS03M027	10 mm	B.571.076	6.0 mm
HSK100AWN32120M	32	72	120	54	10	4.34	BSS03M029	10 mm	B.571.076	6.0 mm

Dynamically Balanced at : G6.3@15,000 RPM
Order Example : HSK100AWN12100M
Dynamically balanced on Request
G2.5@20,000 RPM
Order Example : HSK100AWN12100MG2.5

Scope of Supply : Basic Tool Holder, Lockscrew
Accessories : To be ordered seperately
Pull Stud : Page No.
All details are subject to change without Notice

WHISTLE NOTCH ADAPTERS


DIN 69871

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

COOLANT SYSTEM
AD , AD/B

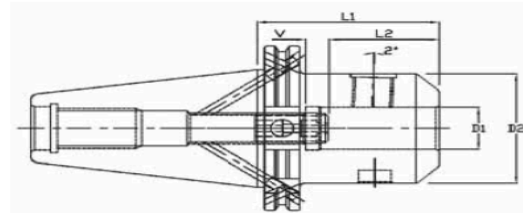

Catalogue No	D1	D2	L1	L2	V	Wt.Kg	Clamp Screw	Allen Key	Stop Screw	Hex
DV40BWN06050M	6	25	50	30	10	0.9	BSS03M012	3 mm	B.571.060	2.5 mm
DV40BWN08050M	8	28	50	30	10	0.9	BSS03M014	4 mm	B.571.067	3.0 mm
DV40BWN10050M	10	35	50	35	10	0.9	BSS03M018	5 mm	B.571.068	4.0 mm
DV40BWN12050M	12	42	50	40	10	1.1	BSS03M023	6 mm	B.571.074	5.0 mm
DV40BWN14050M	14	44	50	40	10	1.3	BSS03M023	6 mm	B.571.074	5.0 mm
DV40BWN16063M	16	48	63	43	10	1.3	BSS03M025	6 mm	B.571.075	6.0 mm
DV40BWN18063M	18	50	63	43	10	1.3	BSS03M025	6 mm	B.571.075	6.0 mm
DV40BWN20063M	20	52	63	45	10	1.3	BSS03M026	8 mm	B.571.076	6.0 mm
DV40BWN25100M	25	65	100	50	10	2.4	BSS03M027	10 mm	B.571.076	6.0 mm
DV40BWN32100M	32	72	100	54	10	2.5	BSS03M029	10 mm	B.571.076	6.0 mm
DV50BWN06063M	6	25	63	30	10	2.7	BSS03M012	3 mm	B.571.060	2.5 mm
DV50BWN08063M	8	28	63	30	10	2.7	BSS03M014	4 mm	B.571.067	3.0 mm
DV50BWN10063M	10	35	63	35	10	2.8	BSS03M018	5 mm	B.571.068	4.0 mm
DV50BWN12063M	12	42	63	40	10	2.9	BSS03M023	6 mm	B.571.074	5.0 mm
DV50BWN14063M	14	44	63	40	10	2.9	BSS03M023	6 mm	B.571.074	5.0 mm
DV50BWN16063M	16	48	63	43	10	3	BSS03M025	6 mm	B.571.075	6.0 mm
DV50BWN18063M	18	50	63	43	10	3.1	BSS03M025	6 mm	B.571.075	6.0 mm
DV50BWN20063M	20	52	63	45	10	3.1	BSS03M026	8 mm	B.571.076	6.0 mm
DV50BWN25080M	25	65	80	50	10	3.8	BSS03M027	10 mm	B.571.076	6.0 mm
DV50BWN32100M	32	72	100	54	10	4.6	BSS03M029	10 mm	B.571.076	6.0 mm

Dynamically Balanced at : G6.3@15,000 RPM
Order Example : DV50BWN06063M
Dynamically balanced on Request
G2.5@20,000 RPM
Order Example : DV50BWN06063MG2.5

Scope of Supply : Basic Tool Holder, Lockscrew
Accessories : To be ordered seperately
Pull Stud : Page No.
All details are subject to change without Notice


WHISTLE NOTCH ADAPTERS

ANSI B5.5

TAPER ACCURACY
AT3

G VALUE
6.3

RPM
15000

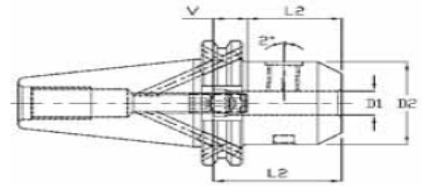

Catalogue No	D1	D2	L1	L2	V	Wt.Kg	Clamp Screw	Allen Key	Stop Screw	Hex
CV40BWN06M244	6	25	62	30	10	1.1	BSS03M012	3 mm	B.571.060	2.5 mm
CV40BWN06M600	6	25	152	30	10	1.43	BSS03M012	3 mm	B.571.060	2.5 mm
CV40BWN08M244	8	28	62	30	10	1.1	BSS03M014	4 mm	B.571.067	3.0 mm
CV40BWN08M600	8	28	152	30	10	1.54	BSS03M014	4 mm	B.571.067	3.0 mm
CV40BWN10M244	10	35	62	35	10	1.14	BSS03M018	5 mm	B.571.068	4.0 mm
CV40BWN10M600	10	35	152	35	10	1.87	BSS03M018	5 mm	B.571.068	4.0 mm
CV40BWN12M260	12	42	66	40	10	1.23	BSS03M023	6 mm	B.571.074	5.0 mm
CV40BWN12M600	12	42	152	40	10	2.08	BSS03M023	6 mm	B.571.074	5.0 mm
CV40BWN14M260	14	44	66	40	10	1.25	BSS03M023	6 mm	B.571.074	5.0 mm
CV40BWN14M600	14	44	152	40	10	2.19	BSS03M023	6 mm	B.571.074	5.0 mm
CV40BWN16M275	16	48	70	43	10	1.35	BSS03M025	6 mm	B.571.075	6.0 mm
CV40BWN16M600	16	48	152	43	10	2.29	BSS03M025	6 mm	B.571.075	6.0 mm
CV40BWN18M275	18	50	70	43	10	1.37	BSS03M025	6 mm	B.571.075	6.0 mm
CV40BWN18M600	18	50	152	43	10	2.31	BSS03M025	6 mm	B.571.075	6.0 mm
CV40BWN20M275	20	52	70	45	10	1.38	BSS03M026	8 mm	B.571.076	6.0 mm
CV40BWN20M600	20	52	152	45	10	2.27	BSS03M026	8 mm	B.571.076	6.0 mm
CV40BWN25M375	25	65	95	50	10	2.17	BSS03M027	10 mm	B.571.076	6.0 mm
CV40BWN25M600	25	65	152	50	10	2.87	BSS03M027	10 mm	B.571.076	6.0 mm
CV40BWN32M388	32	72	99	54	10	2.45	BSS03M029	10 mm	B.571.076	6.0 mm
CV40BWN32M600	32	72	152	54	10	3.16	BSS03M029	10 mm	B.571.076	6.0 mm
CV50BWN06M244	6	25	62	30	10	3.14	BSS03M012	3mm	B.571.060	2.5mm
CV50BWN06M600	6	25	152	30	10	3.42	BSS03M012	3mm	B.571.060	2.5mm
CV50BWN08M244	8	28	62	30	10	3.16	BSS03M014	4mm	B.571.067	3 mm
CV50BWN08M600	8	28	152	30	10	3.53	BSS03M014	4mm	B.571.067	3 mm
CV50BWN10M244	10	35	62	35	10	3.2	BSS03M018	5mm	B.571.068	4 mm
CV50BWN10M600	10	35	152	35	10	3.93	BSS03M018	5mm	B.571.068	4 mm
CV50BWN12M264	12	42	67	40	10	3.3	BSS03M023	6mm	B.571.074	5 mm
CV50BWN12M600	12	42	152	40	10	4.14	BSS03M023	6mm	B.571.074	5 mm
CV50BWN14M264	14	44	67	40	10	3.33	BSS03M023	6mm	B.571.074	5 mm
CV50BWN14M600	14	44	152	40	10	4.34	BSS03M023	6mm	B.571.074	5 mm
CV50BWN16M275	16	48	70	43	10	3.4	BSS03M025	6mm	B.571.075	6 mm
CV50BWN16M600	16	48	152	43	10	4.6	BSS03M025	6mm	B.571.075	6 mm
CV50BWN18M275	18	50	70	43	10	3.41	BSS03M025	6mm	B.571.075	6 mm
CV50BWN18M600	18	50	152	43	10	4.6	BSS03M025	6mm	B.571.075	6 mm
CV50BWN20M275	20	52	70	45	10	3.4	BSS03M026	8mm	B.571.076	6 mm
CV50BWN20M600	20	52	152	45	10	4.71	BSS03M026	8mm	B.571.076	6 mm
CV50BWN25M375	25	65	95	50	10	4.2	BSS03M027	10mm	B.571.076	6 mm
CV50BWN25M600	25	65	152	50	10	5.54	BSS03M027	10mm	B.571.076	6 mm
CV50BWN32M388	32	72	99	54	10	4.5	BSS03M029	10mm	B.571.076	6 mm
CV50BWN32M600	32	72	152	54	10	6.06	BSS03M029	10mm	B.571.076	6 mm

Dynamically Balanced at : G6.3@15,000 RPM
 Order Example : CV40BWN10M244
 Dynamically balanced on Request
 G2.5@20,000 RPM
 Order Example : CV40BWN10M244G2.5

Scope of Supply : Basic Tool Holder, Lockscrew
 Accessories : To be ordered separately
 Pull Stud : Page No.
 All details are subject to change without Notice