


Pull Studs RK BT-MAS-403

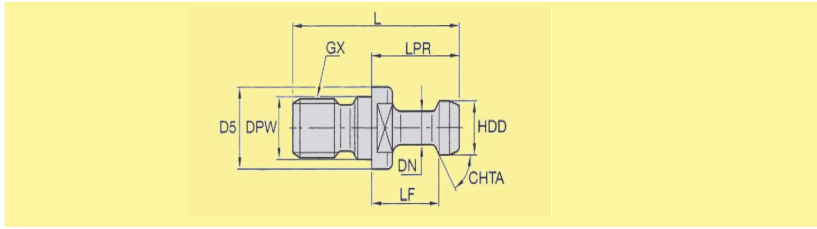


Pull Studs RK BT-MAS-Style With Pilot—METRIC

Catalogue No	Taper Size	GX	CHTA in Deg .	D5	DN	DPW	HDD	LF	LPR	L	WF
RK30BT1M	30	M12-1.75	45	16.40	6.95	12.49	10.95	17.95	22.95	43	13
RK30BT2M	30	M12-1.75	60	16.40	6.95	12.49	10.95	17.95	22.95	43	13
RK40BT1M	40	M16-2.00	45	22.90	9.95	16.99	14.95	27.95	34.95	60	19
RK40BT2M	40	M16-2.00	60	22.90	9.95	16.99	14.95	27.95	34.95	60	19
RK40BT3M	40	M16-2.00	90	22.90	9.95	16.99	14.95	27.95	34.95	60	19
RK50BT1M	50	M24-3.00	45	37.90	16.95	24.99	22.95	34.95	44.95	85	30
RK50BT2M	50	M24-3.00	60	37.90	16.95	24.99	22.95	34.95	44.95	85	30
RK50BT3M	50	M24-3.00	90	37.90	16.95	24.99	22.95	34.95	44.95	85	30

Pull Studs RK BT-MAS-Style With Pilot—INCH

Catalogue No	Taper Size	GX	CHTA in Deg .	DS	DN	DPW	HDD	LF	LPR	L	WF
RK31114	40	5/8"-11	45	0.938"	0.392"	0.636"	0.589"	0.988"	1.264"	2.250"	0.750"
RK31114B	40	5/8"-11	90	0.938"	0.392"	0.636"	0.589"	0.988"	1.264"	2.250"	0.750"
RK31118	50	1.00"-8	45	1.438"	0.668"	1.026"	0.903"	1.384"	1.778"	3.355"	1.250"
RK31118B	50	1.00"-8	90	1.438"	0.668"	1.026"	0.903"	1.384"	1.778"	3.355"	1.250"

Pull Studs RK DV DIN 69872

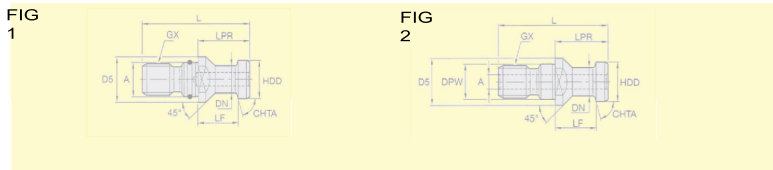

Pull Studs RK DIN 69872 Form-A — METRIC- No Through Coolant

Catalogue No	Taper Size	FIG	GX	CHTA in Deg .	DS	DN	DPW	HDD	LF	LPR	L	WF
RK40DVM	40	1	M16-2.00	75	22.90	13.95	16.97	18.97	20	26	54	19
RKSODVM	50	1	M24-3.00	75	35.90	20.95	24.97	27.97	25	34	74	30

Pull Studs RK DIN 69872 Form-A — METRIC Through Coolant

Catalogue No	Taper Size	FIG	GX	CHTA in Deg .	DS	DN	DPW	HDD	LF	LPR	L	WF	A
RK40DVBM	40	2	M16-2.00	75	22.90	13.95	16.97	18.97	20	26	54	19	7.05
RKSODVBM	50	2	M24-3.00	75	35.90	20.95	24.97	27.97	25	34	74	30	11.55